

**FISHING LAMP &
FISH SHOAL
LURING EQUIPMENTS**
High luminance, Long life & New Technology

SK LITEC

FISH SHOAL LURING EQUIPMENT MANUFACTURER



CONTENTS 目錄


- 05 | Metal halide lamp 金屬鹵化物燈
- 07 | Metal halide slim lamp 金屬鹵化物細長的燈
- 08 | Halogen lamp 鹵鎢燈
- 09 | Stabilizer 安定器
- 11 | Underwater lamp 水中燈
- 13 | Automatic winch machine 捲揚機
- 14 | Control panel / Dimmer 控制面板 / 調光器
- 15 | Underwater lamp Holder 燈座
- 17 | Underwater lamp stabilizer 水中燈用安定器
- 18 | Socket 燈口

FISH SHOAL LURING EQUIPMENTS


Our fish shoal luring equipments are superior to the existing equipments for fishing and designed to get high luring effect both on the deck lamp and on the underwater lamp.




FISH SHOAL LURING SYSTEM 魚羣集魚系統

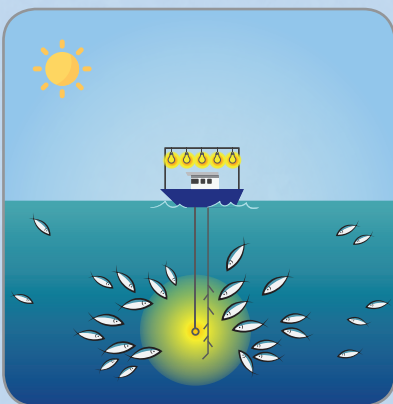

Gathering a shoal of fish with underwater lamps in the daytime.

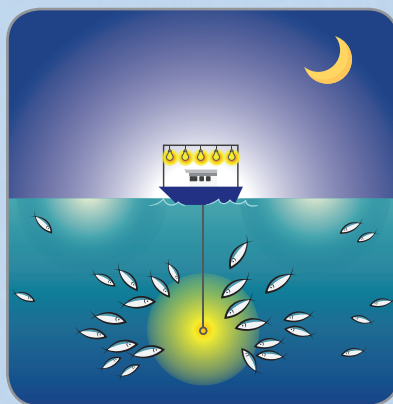

Gathering a shoal of fish at night.

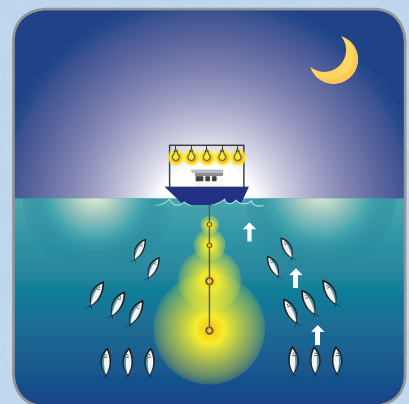

Adjusting the light with dimmer to lure the fish shoal up.

Metal Halide Fishing Lamp & Stabilizer Manufacturer

漁船用金屬鹵化物燈和安定器專業製造企業

LED Fishing Lamp Manufacturer

漁船用 LED 集魚燈專業製造企業

Underwater Fish Shoal Luring Equipment Manufacturer

水中魚羣集魚設備專業製造企業



MANUFACTURED GOODS

製造品



High luminance, Long life & New technology

高亮度、長壽命 & 新技術




METAL HALIDE LAMP 金屬鹵化物燈

- High luminance & high efficiency
高亮度高效率
- High luring ability by sun color
太陽光集魚能力




SK15NR-C / MF1500H2-C

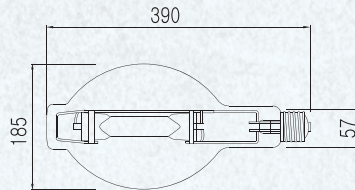

Power (W)	1,500W
Voltage(V)/Current (A)	275V / 6.7A
	285V / 7.8A
Luminous flux (lm)	238,000lm
	263,000lm
Efficiency (lm/W)	135lm/W
Color temperature (K)	4,000K




SK20NR-C

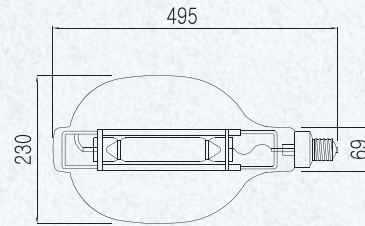

Power (W)	2,000W
Voltage(V)/Current (A)	240V / 8.7A
Luminous flux (lm)	248,000lm
Efficiency (lm/W)	123lm/W
Color temperature (K)	5,000K




SK30NR-C

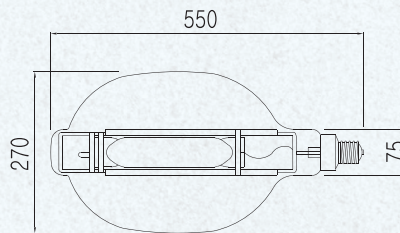


Power (W)	3,000W
Voltage(V)/Current (A)	235V / 12.6A
	240V / 13.6A
Luminous flux (lm)	370,000lm
	395,000lm
Efficiency (lm/W)	125lm/W
Color temperature (K)	5,000K




MF3000H2-C

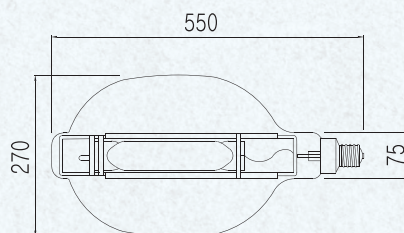

Power (W)	3,000W
Voltage(V)/Current (A)	250V / 12.7A
Luminous flux (lm)	395,000lm
Efficiency (lm/W)	125lm/W
Color temperature (K)	5,000K

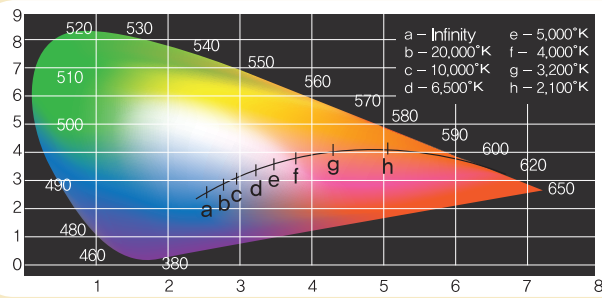


Color comparison

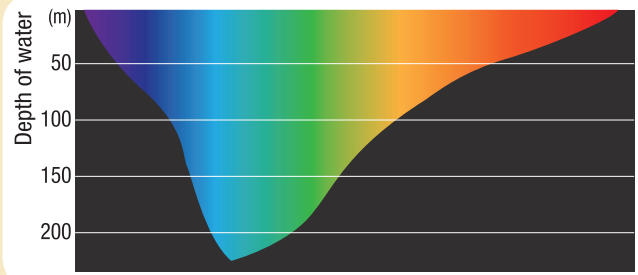

Depth penetration




SK40NR-C / SK40HB-C

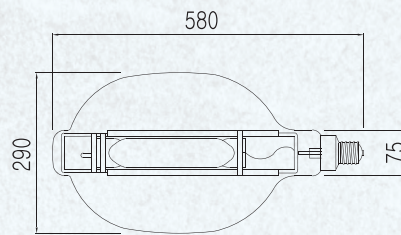

Power (W)	4,000W
Voltage(V) / Current (A)	240V / 16.5A 235V / 17.8A
Luminous flux (lm)	470,000lm 485,000lm
Efficiency (lm/W)	122lm/W 124lm/W
Color temperature (K)	5,000K




MF4000W-C

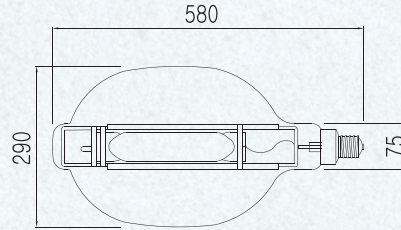

Power (W)	4,000W
Voltage(V) / Current (A)	240V / 16.8A
Luminous flux (lm)	470,000lm
Efficiency (lm/W)	125lm/W
Color temperature (K)	5,000K




MF4000H2-C

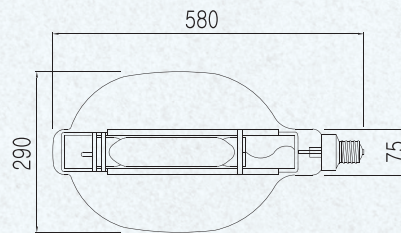

Power (W)	4,000W
Voltage(V) / Current (A)	250V / 16.7A
Luminous flux (lm)	485,000lm
Efficiency (lm/W)	125lm/W
Color temperature (K)	5,000K



MF4000H3-C

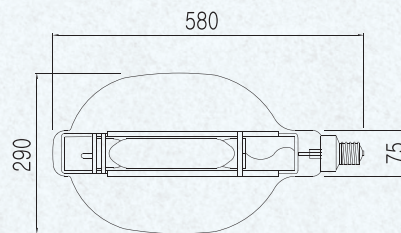

Power (W)	4,000W
Voltage(V) / Current (A)	240V / 17.8A
Luminous flux (lm)	490,000lm
Efficiency (lm/W)	122lm/W
Color temperature (K)	5,000K




METAL HALIDE SLIM LAMP 金屬鹵化物細長的燈

- **Compact and light enough to make it easy to use**
小體積 & 光線充足, 使用方便
- **High luring ability by sun color**
太陽光集魚能力




MQ1500H2-C

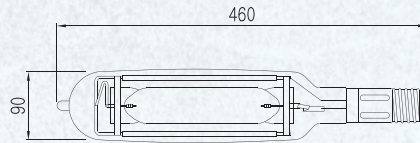

Power (W)	1,500W
Voltage(V) / Current (A)	285V / 7.8A
Luminous flux (lm)	263,000lm
Efficiency (lm/W)	135lm/W
Color temperature (K)	4,000K




MQ2000H2-C

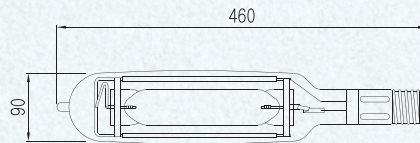

Power (W)	2,000W
Voltage(V) / Current (A)	240V / 8.7A
Luminous flux (lm)	248,000lm
Efficiency (lm/W)	124lm/W
Color temperature (K)	5,000K




MQ3000H2-C

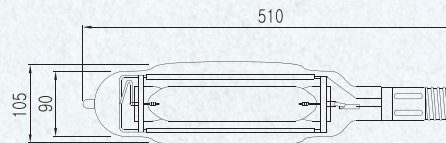

Power (W)	3,000W
Voltage(V) / Current (A)	235V / 12.6A 240V / 13.6A
Luminous flux (lm)	370,000lm 395,000lm
Efficiency (lm/W)	125lm/W
Color temperature (K)	5,000K




MQ4000H2-C

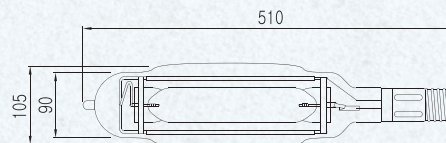


Power (W)	4,000W
Voltage(V) / Current (A)	235V / 17.8A
Luminous flux (lm)	485,000lm
Efficiency (lm/W)	124lm/W
Color temperature (K)	5,000K



HALOGEN LAMP 鹵鎢燈




U Type halogen tube




- Halogen : H
- Tungsten : T
- ⊙ Tungsten Halide : TH₂

Halogen cycle

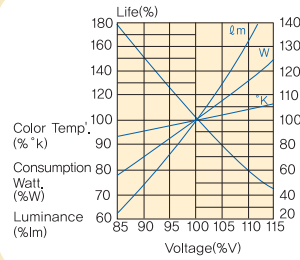


Comparison by voltage



Luminosity comparison




550/750/1,000W

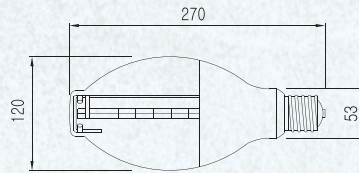

Model	SL550 / 750 / 1000
Watt	550 / 750 / 1,000W
Voltage	110 / 220V
Base	E39




550/750/1,000W (U-TYPE)

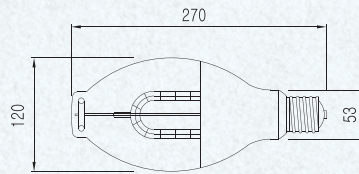

Model	SU550 / 750 / 1000
Watt	550 / 750 / 1,000W
Voltage	110 / 220V
Base	E39




1,500W

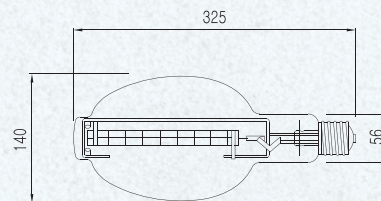

Model	SL1500
Watt	1,500W
Voltage	110 / 220V
Base	E39



2,000/3,000W (U-TYPE)

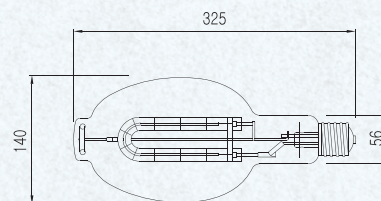

Model	SU2000 / SU3000
Watt	2,000 / 3,000W
Voltage	110 / 220V
Base	E39




STABILIZER 安定器

- **Compact size, light weight and highly efficient**
小體積，重量輕，高效率
- **Good starting ability by lead peak type(RC-Type)**
快速啓動靜電力型 (RC型)
- **Perfect Resistant to moisture & vibration by coiled bobbins**
線軸周圍纏繞線圈，有助於緩解震動和抵抗潮氣的侵蝕




KSL-152B

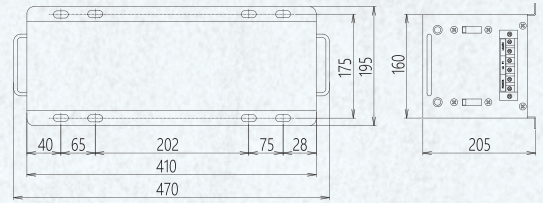

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
SK15NR-C	220/380/440V	275V / 6.7A	7.9A	60Hz (50Hz)	22kg
MF1500H2-C	220/380/440V	285V / 7.8A	9A	60Hz (50Hz)	25kg




KSL-202B

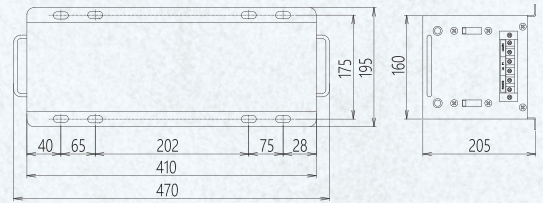

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
2,000W+2,000W	220/380/440V	240V / 8.7A	10.3A	60Hz (50Hz)	26kg




KSL-301B

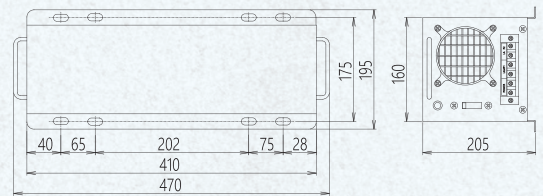

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
3,000W (3kw)	220/380/440V	235V / 12.6A	18.5A	60Hz (50Hz)	24kg




KSL-401B

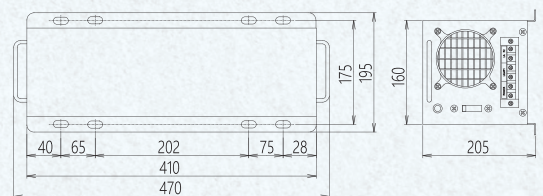

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
4,000W (4kw)	220/380/440V	240V / 16.5A	22A	60Hz (50Hz)	25kg




KSL-302B
KSL-302HB

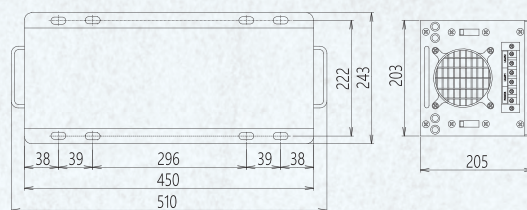

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
3,000W+3,000W	220/380/440V	235V / 12.6A	18.5A	60Hz (50Hz)	34kg
3,000W+3,000W	220/380/440V	240V / 13.6A	19A	60Hz (50Hz)	34.5kg




MF-302BT

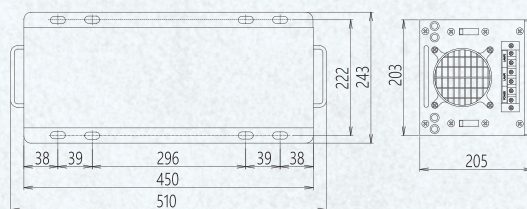

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
MF3000H2-C x 2	220/380/440V	250V / 12.7A	17A	60Hz (50Hz)	34kg




KSL-402B
KSL-402HB

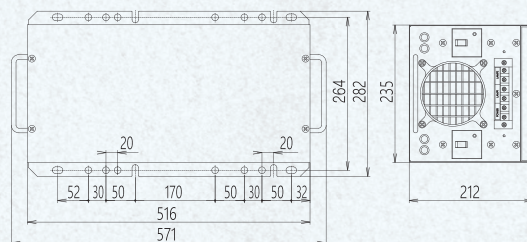

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
4,000W+4,000W	220/380/440V	240V / 16.5A	22A	60Hz (50Hz)	46kg
4,000W+4,000W	220/380/440V	235V / 17.8A	22.6A	60Hz (50Hz)	47kg



MF-402BT

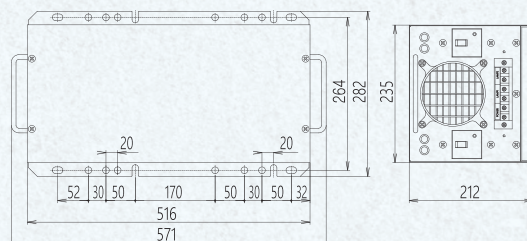

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
MF4000W-C x 2	220/380/440V	240V / 16.8A	20.5A	60Hz (50Hz)	47kg
MF4000H2-C x 2	220/380/440V	250V / 16.7A	20.5A	60Hz (50Hz)	47kg



METAL HALIDE UNDERWATER LAMP 金屬鹵化物水中燈

- **Compact size & long life**
小體積 & 長壽命
- **Various lamp colors in green, white and blue.**
綠色、白色、藍色的多種燈色
- **Available in depth of 400m using exclusive lamp holder**
使用專用燈座時能達到水深400m



Model	Consumption	Lamp Voltage	Lamp Current	Holder	Size
MH-100GD / HB / HW	10,000W (10kw)	490V	20.0A	UH-10BS	
MH-50HG / HB / HW	5,000W (5kw)	290V	18.5A	UH-5B UH-5BS	
MH-40HG / HB / HW	4,000W (4kw)	230V	18A	UH-5B UH-5BS	
MH-30HG / HB / HW	3,000W (3kw)	230V	14A	UH-3B UH-3BS	
MH-20HG / HB / HW	2,000W (2kw)	230V	9.3A	UH-3B UH-3BS	




White color (W)



Green color (G)



Blue color (B)

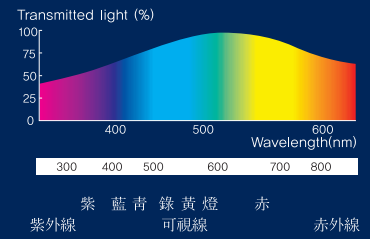

Penetration of color




Model	Consumption	Lamp Voltage	Lamp Current	Holder	Size
MHT-5000G / W / B	5,000W (5kw)	290V	18.5A	UHT-5BS	
MHT-4000G / W / B	4,000W (4kw)	230V	18A	UHT-5B UHT-5BS	
MHT-3000G / W / B	3,000W (3kw)	230V	14A	UHT-5B UHT-5BS	
MHT-2000G / W / B	2,000W (2kw)	230V	9.3A	UHT-5B	
QW2-200 QW3-200 QW5-200 (Halogen Lamp)	2,000W(2kw) 3,000W(3kw) 5,000W(5kw)	220V	9A 13A 22A	UH-5 UH-5S	




AUTOMATIC WINCH MACHINE 卷揚機

- High powered to raise and lower underwater lamp to a depth of 400m
水中燈在水下400米高效的自由升降
- Convenient speed control when raising and lowering the underwater lamp
水中燈升降時可輕鬆進行速度控制




SK-202WS

Inverter Motor	2 Motor / 220V / 3Ø
Cable Speed	20 ~ 65m / Min (Speed Control)
Specification	60Hz (50Hz) / 80kg




SK-102WS

Inverter Motor	1 Motor / 220V / 3Ø
Cable Speed	20 ~ 65m / Min (Speed Control)
Specification	60Hz (50Hz) / 75kg



SK-102WC

Motor (Gear)	1 Motor / 220V / 3Ø
Cable Speed	45m / Min (Constant)
Specification	60Hz (50Hz) / 70kg



SK-101WS

Inverter Motor	1 Motor / 220V / 3Ø
Cable Speed	20 ~ 65m / Min (Speed Control)
Specification	60Hz (50Hz) / 60kg






SK-CP-4M4R




Name	Remote Control Panel
Use	Metal Halide Lamp -4 pcs
Controller V	AC110V / 60Hz (50Hz) / 25kg



SK-CP-4M2R




Name	Remote Control Panel
Use	Metal Halide Lamp -4 pcs
Controller V	AC110V / 60Hz (50Hz) / 20kg



SK-CP-2M2R




Name	Remote Control Panel
Use	Metal Halide Lamp -2 pcs
Controller V	AC110V / 60Hz (50Hz) / 15kg



ADC-6PS



Name	Dimmer
Use	5kw /10kw Underwater Lamp
Controller V	AC110V / 60Hz (50Hz) / 22kg

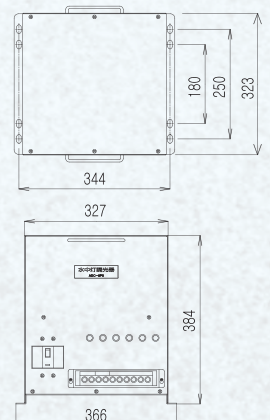




UNDERWATER LAMP HOLDER 燈座

- **Easy to handle and replace due to compact size**
由於小體積容易更換
- **Can withstand high water pressure to depth of 400m**
能頂住高水壓400米的深度
- **Durable using BC and Stainless steel that are resistant to seawater**
由於使用耐久性的BC青銅鑄件和不鏽鋼，有效的克服海水阻力和壓力




UH-10BS

Use	MH-100GD/HB/HW
Test	40kg/cm ² (400m)
Weight	11kg




UH-5BS

Use	MH-40HG/HB/HW MH-50HG/HB/HW
Test	40kg/cm ² (400m)
Weight	10.5kg




UH-3BS

Use	MH-20HG/HB/HW MH-30HG/HB/HW
Test	40kg/cm ² (400m)
Weight	10kg



UH-5S

Use	Halogen Lamp
Test	40kg/cm ² (400m)
Weight	9.5kg




Holder Parts




UH-5B

Use	MH-40HG/HB/HW MH-50HG/HB/HW
Test	40kg/cm ² (400m)
Weight	6.5kg




UH-3B

Use	MH-20HG/HB/HW MH-30HG/HB/HW
Test	40kg/cm ² (400m)
Weight	6.2kg




UHT-5B (T-Type)

Use	MHT-2/3/4/5,000GW
Test	20kg/cm ² (200m)
Weight	6.0kg



UH-5

Use	Halogen Lamp
Test	40kg/cm ² (400m)
Weight	5.5kg






UNDERWATER LAMP STABILIZER 水中燈安定器

- **Compact size, light weight and highly efficient**
小體積，重量輕，高效率
- **Good starting ability by lead peak type(RC-Type)**
好的起動能力(RC 型)
- **Because of built-in ignitor, can start a lamp well**
內置有自動點火器，有效開啓照射器




KSL-30F

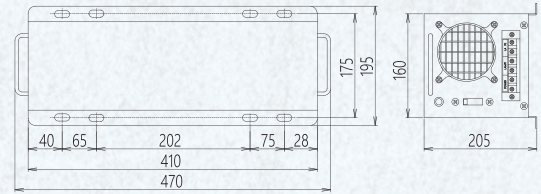

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
3,000W (3kw)	220V / 240V	14A	17A	60Hz (50Hz)	26kg




KSL-40F

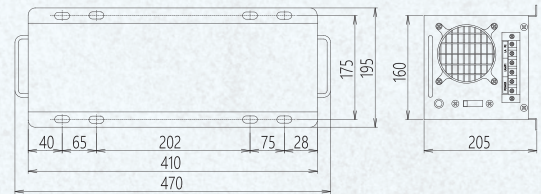

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
4,000W (4kw)	220V / 240V	18A	20.3A	60Hz (50Hz)	28kg




**KSL-50F
MH-50F**

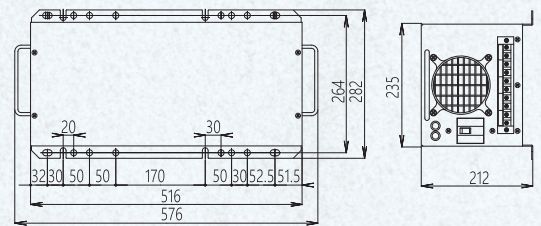

Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
5,000W (5kw)	220V / 240V	18.5A	23A	60Hz (50Hz)	34kg




**KSL-100F
MH-100F**

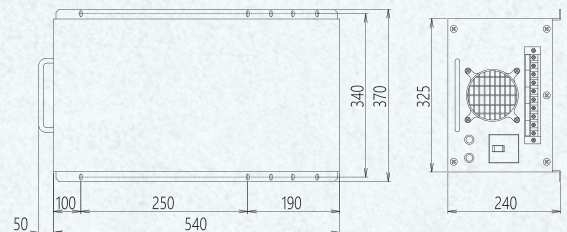


Output Power	Input Voltage	Lamp Current	Short Current	Frequency	Weight
10,000W (10kw)	220V / 240V	20A	27.5A	60Hz (50Hz)	65kg




SOCKET 燈口

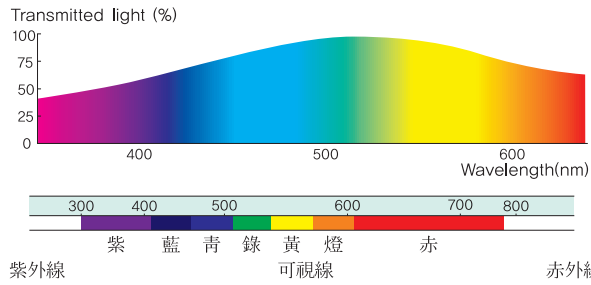


Penetration of color

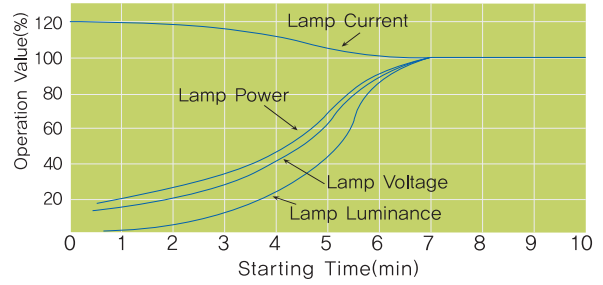

Starting characteristics

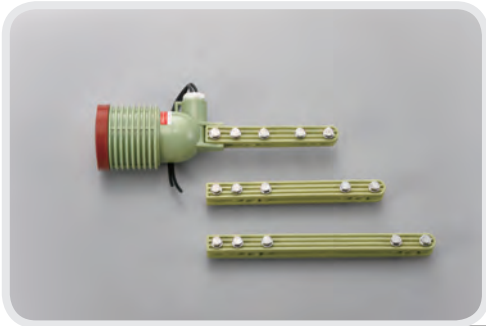


Halogen Lamp

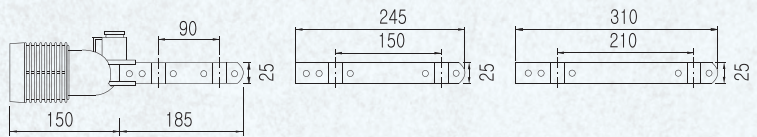

Model	HS-20P
-------	--------




1.5kw Metal Halide Lamp

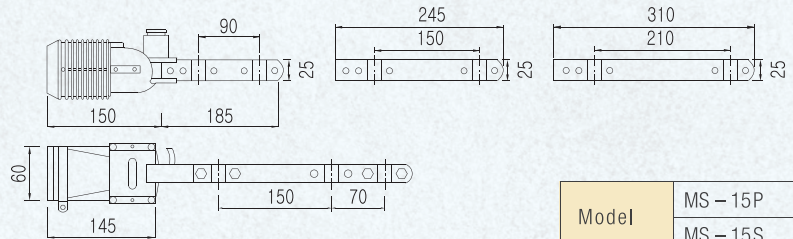

Model	MS-15P
	MS-15S




2kw Metal Halide Lamp

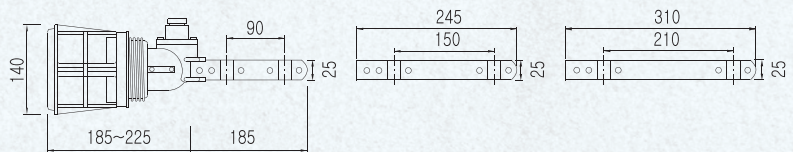

Model	Bulb : MS-20B
	Slim : MS-20S



3/4kw Metal Halide Lamp

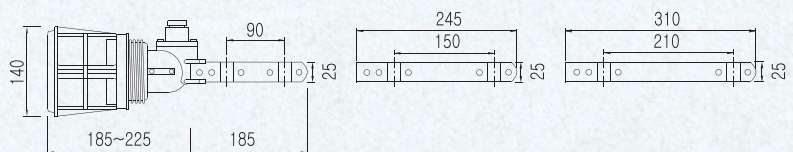

Model	Bulb : MS-34B
	Slim : MS-34S

SK LITEC CO.,LTD.



Address

5, Gupyeong-ro, Saha-gu, Busan, KOREA

韓國 釜山廣域市 沙下區 舊平路 5

Tel : +82-51-415-5599 Fax : +82-51-415-5636

Website : www.samsunglitec.co.kr

E-mail : samsunglitec@naver.com

Agency Information

